


PHILIPS *Service*

RADIO

22RL798/15

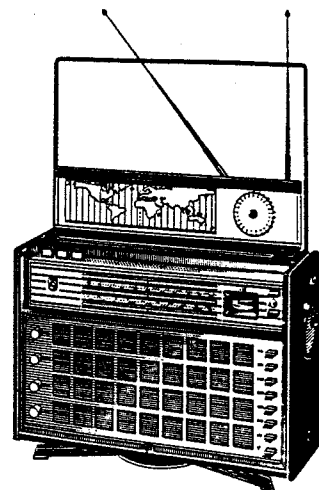


1	Tuning FM	S308/S311	10	PU switch	SK-K	18	MW switch	SK-E
2	Volume control	R415	11	On-off indication		19	LW switch	SK-F
3	High notes	R414	12	On-off switch	SK-P	20	Aerial switch	SK-G
4	Low notes	R416	13	FM switch	SK-H	21	Tuning AM	C410
5	Fine tuning	R413	14	SW1 switch	SK-A	22	Car aerial	
6	AFC	SK-L	15	SW2 switch	SK-B	23	Aerial selector switch	SK-R
7	Battery check	SK-M	16	SW3 switch	SK-C	24	External supply	
8	Scale illumination	SK-N	17	SW4 switch	SK-D	25	Lock of rear cover	
9	Tuning indicator	Ind.				26	Earphone connection	

SPECIFICATION

Loudspeaker	4 Ω
IF-AM	470 kHz
IF-FM	10,7 MHz
Battery voltage	9 V (6x1,5 V)
Consumption (without signal)	21 mA (AM)
	22 mA (FM)
Output	1 W
Dimensions	370x255x120 mm

WAVE RANGES

LW	: 150 - 415 kHz	(2000 - 725 m)
MW	: 517 - 1622 kHz	(580 - 185 m)
SW4	: 1,6 - 4,2 MHz	(187 - 71,4 m)
SW3	: 4,2 - 8 MHz	(71,4 - 37,5 m)
SW2	: 8 - 16 MHz	(37,5 - 18,75 m)
SW1	: 16 - 27 MHz	(18,75 - 11,1 m)
FM	: 87,5 - 108 MHz	

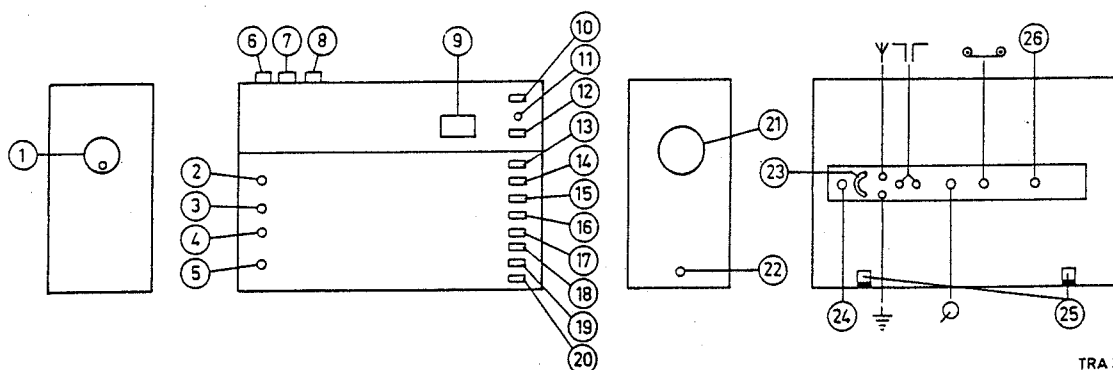

COMBINED ELECTRONIC SERVICES LTD.

QUEENSWAY WADDON FACTORY ESTATE CROYDON CR9 4DR

TELEPHONES :

Spare part orders: 01-686 7311

After business hours: Recorded messages on both lines

General service enquiries: 01-688 7722

TELEX: 262308

Index: GS21889-CS21895

SERVICE INFORMATION										
------------------------	--	--	--	--	--	--	--	--	--	--

The use of the aerals

- Ferroceptor** : is used for the reception of LW and MW. It is also used for determining the direction of LW and MW (sounding). If the ferroceptor axis, which is also the longitudinal axis of the apparatus, points in the direction of the transmitter the reception is minimal.
- Frame aerial** : is used for the reception of SW1-2-3-4. It is also used for determining the direction of SW1-2-3-4 (sounding). If the plane of the frame (the short axis of the apparatus) points in the direction of the transmitter the reception is minimal.
- Outdoor aerial** : is used for the reception of weak stations on LW, MW and SW1-2-3-4. When the outdoor aerial is used the ferroceptor should be switched off.
- Car aerial** : is used for the reception of FM, LW, MW and SW1-2-3-4. When it is used, SK-R, 2-3 should be interconnected for the reception of FM, whereas for the reception of LW and MW the ferroceptor should be switched off.
- Dipole aerial** : is used for the reception of FM, and, because of its working as a normal aerial, it can also be used to receive LW, MW and SW1-2-3-4. For reception of LW, MW and SW1-2-3-4, SK-R, 2-3 should be interconnected and the ferroceptor should be switched off.
- Rod aerals** : these are used to receive FM. If SK-R, 2-3 are interconnected they can also be used to receive SW1-2-3-4 and, if the ferroceptor is switched off, MW and LW can also be received.

REMOVEMENT OF THE CABINET

Removing the back of the receiver

Remove the ornamental screw between the two telescopic aerial rods. Next, remove the battery lid. Unscrew the four screws A (see Fig. 1) Carefully lift the back in a slanting position.

Removing the battery holder

After having removed the back of the receiver, remove the six screws B, see Fig. 2. Slightly lift the battery holder and then remove it from the cabinet by carefully tilting it.

Removing the front (this can only be removed if the back has been removed)

Remove the four metal knobs (vol, high, low, fine tuning) by pulling them forwards. Loosen screw C and unscrew screws D, see Fig. 2. Two clamping springs prevent screws C from falling down, Carefully hinge the front up.

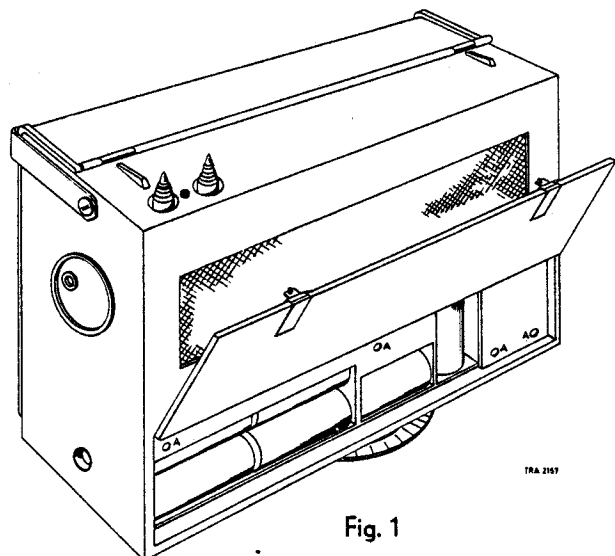


Fig. 1



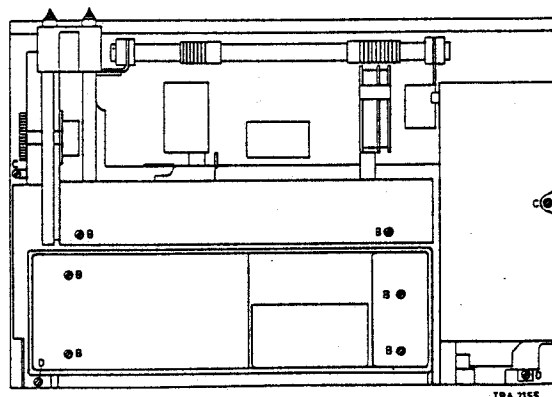


Fig. 2

474.	473.	TV	XY SU	AA BB	WZ CC	J 480	K R.	P	Q	LMNO	F	H 459	E ABCDG	481	483-49
539	538	553	536 537 539	504	506 555 540 507 534	554 556 552 559 510-512 532 514-516 518-520	513 533 517 52'							481	483-49
549.	560. 544-547.	541 542. 551	557 543 548. 558.	550.	528-531	527-526.	435 438 497.								
678	515. 616. 611-613.		625.	610 614.	621	605 624. 604.	803.								
75.	617 631. 632. 626.	633+636	629 630 622 511 628 619 618	623	637 638. 620.		627								

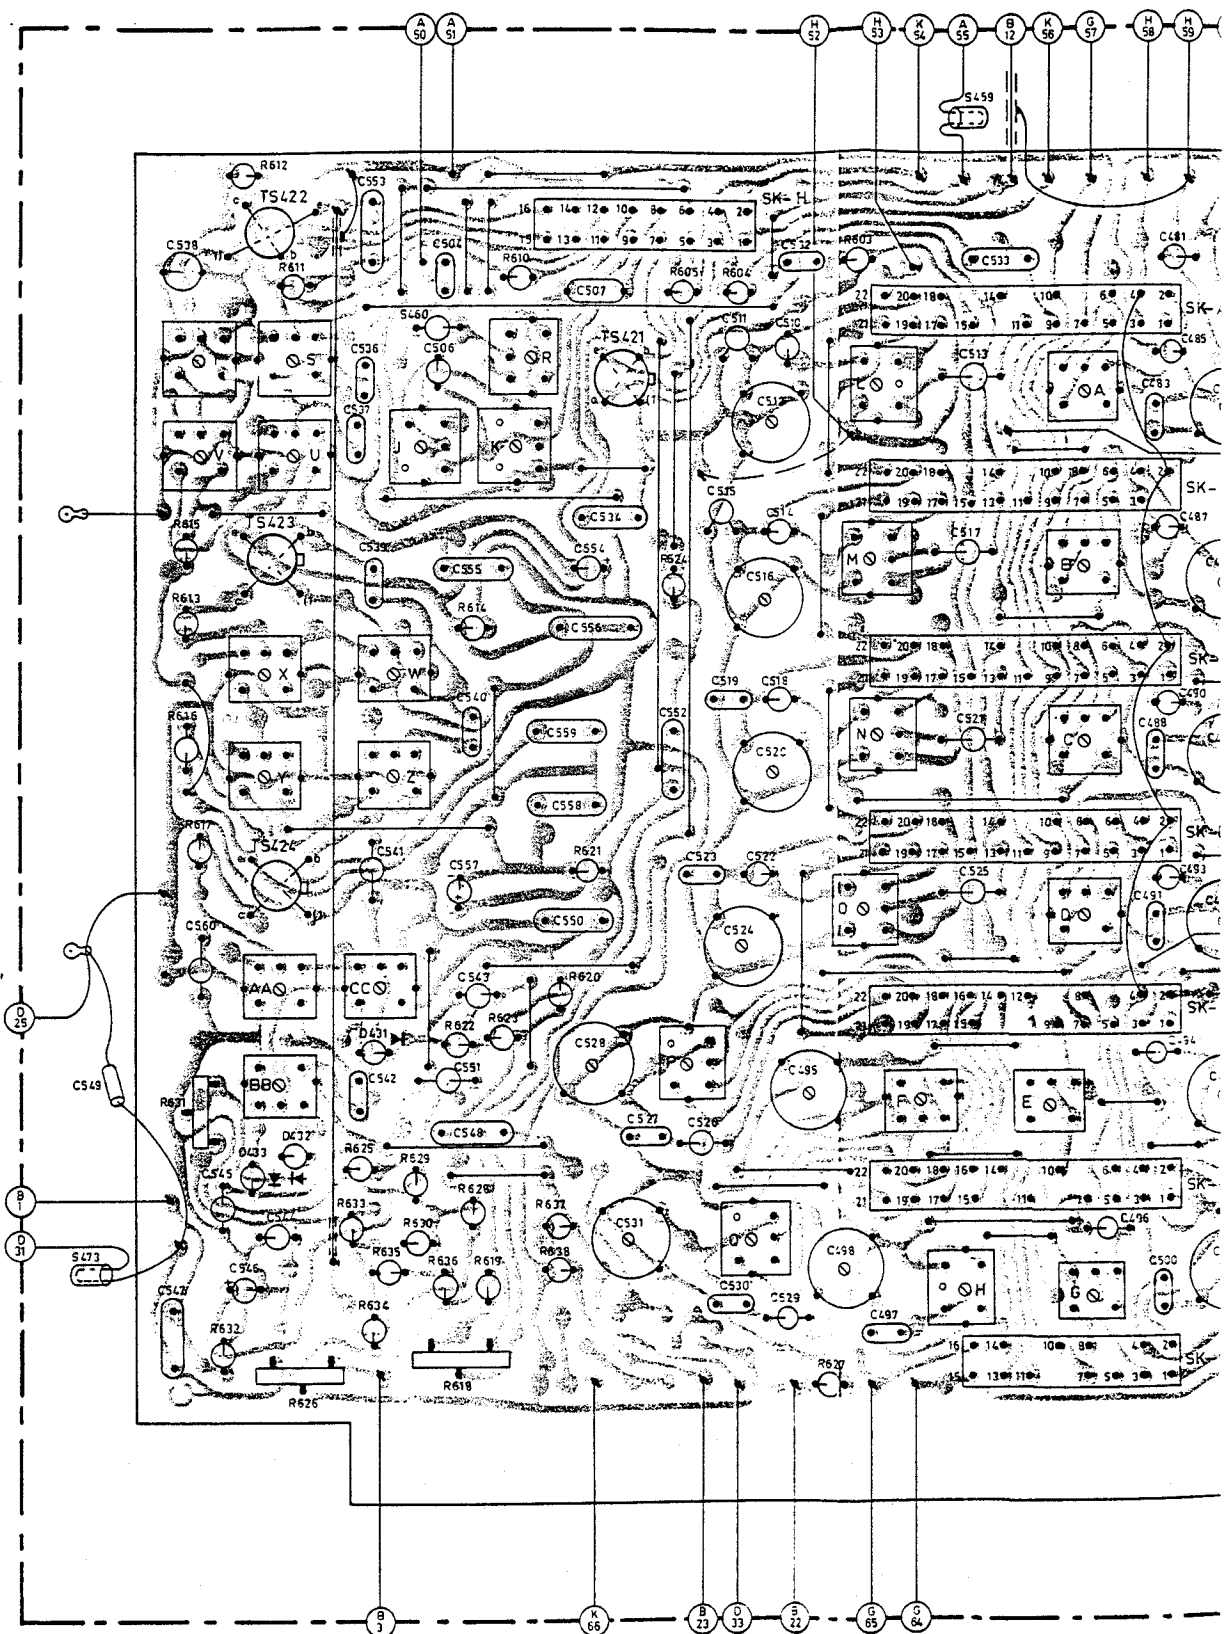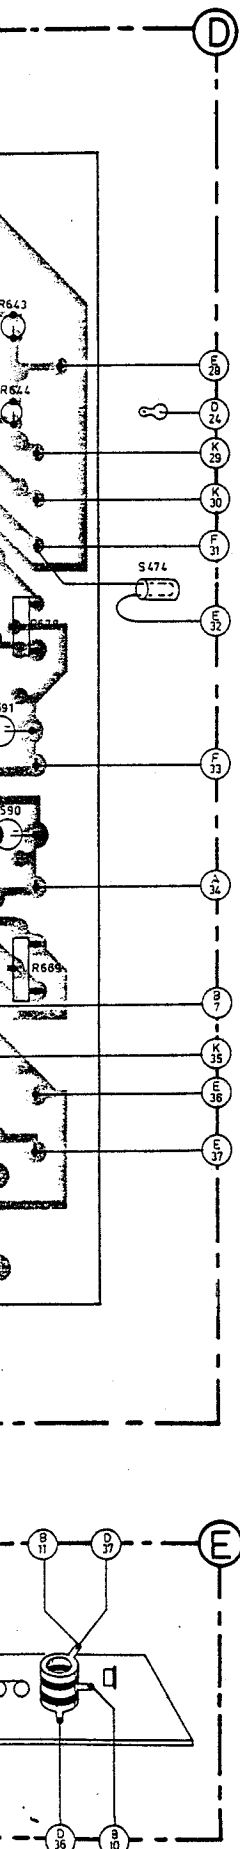


Wiring example : Wire (F1) (mentioned under unit B) leads to unit F, and is then mentioned (B1)

Voorbeeld bedrading : Draad (F1) (genoemd bij unit B) gaat naar unit F, en is daar (B1) genoemd

Exemple de câblage : Le fil (F1) (mentionné sous bloc B) va vers le bloc F, où il est indiqué sous (B1)


Verdrahtungsbeispiel : Draht (F1) (bei Einheit B genannt) führt nach Einheit F und wird dort als (B1) bezeichnet











Ejemplo de cableado : El hilo (F1) (mencionado en la unidad B) va hacia la unidad F y allí está marcada con (B1)

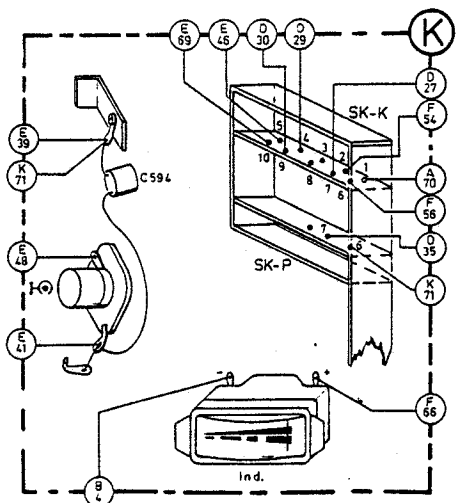

der unit B) leads to unit F, and is then mentioned (B1)
 unit B) gaat naar unit F, en is daar (B1) genoemd
 ous bloc B) va vers le bloc F, où il est indiqué sous (B1)
 B genannt) führt nach Einheit F und wird dort als (B1) bezeichnet
 o en la unidad B) va hacia la unidad F y allí está marcada con (B1)

S	404	305, 306, 307	459	308, 444, 446	309	440-443, 445, 447	310	448, 314, 313, 315, 311	449, 450	461	453-458	
C	482	490	322, 321+324, 326	327	505, 328	329	483+489, 495, 331, 330, 325	339, 333	340, 335, 336, 334	337, 506	504	507
C	500	499, 501	481, 483	410a	494, 496	491, 492	498, 497	410b			510+531	
R	601		345	346		347	348	350	349			611, 612
R												

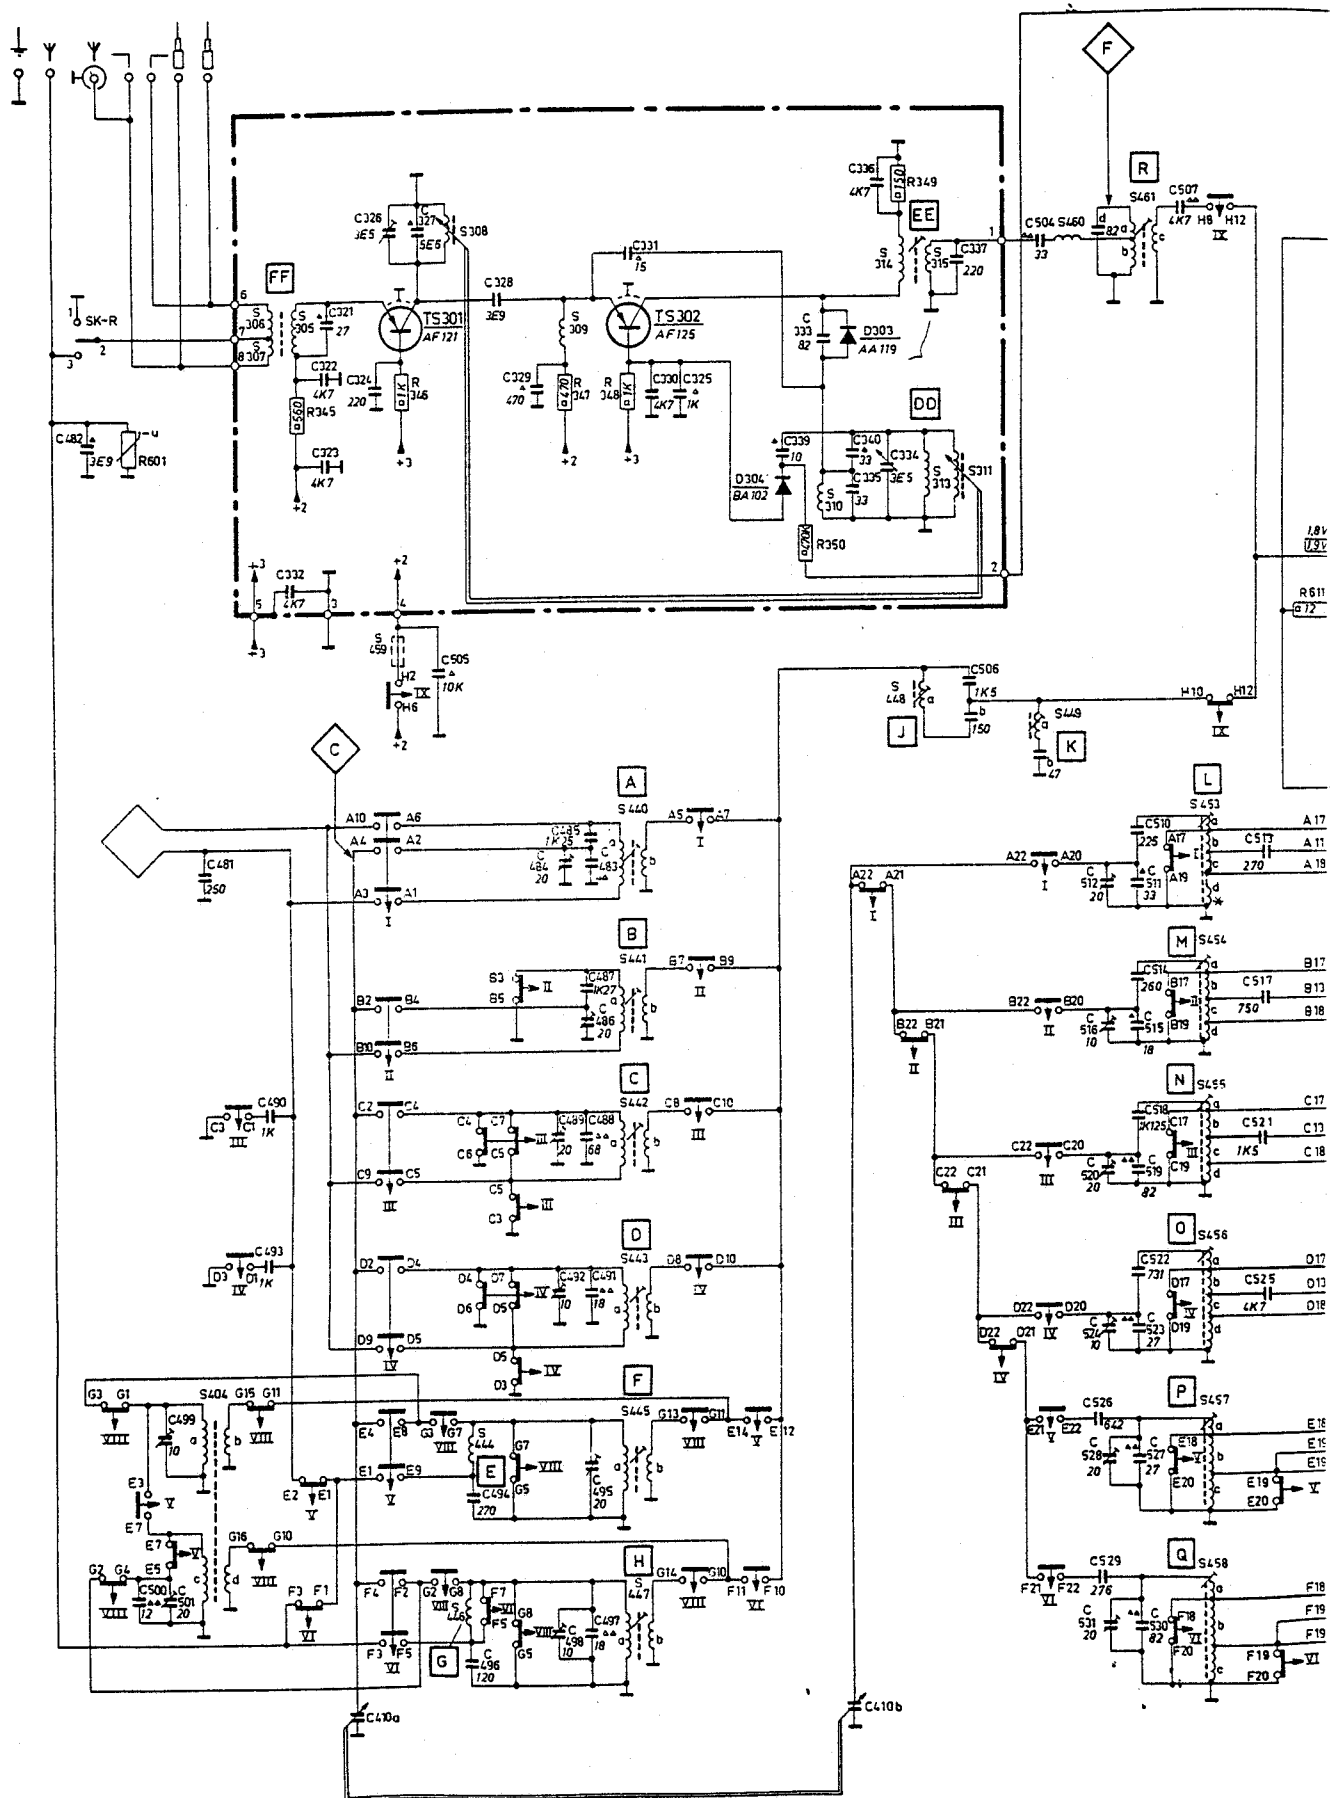


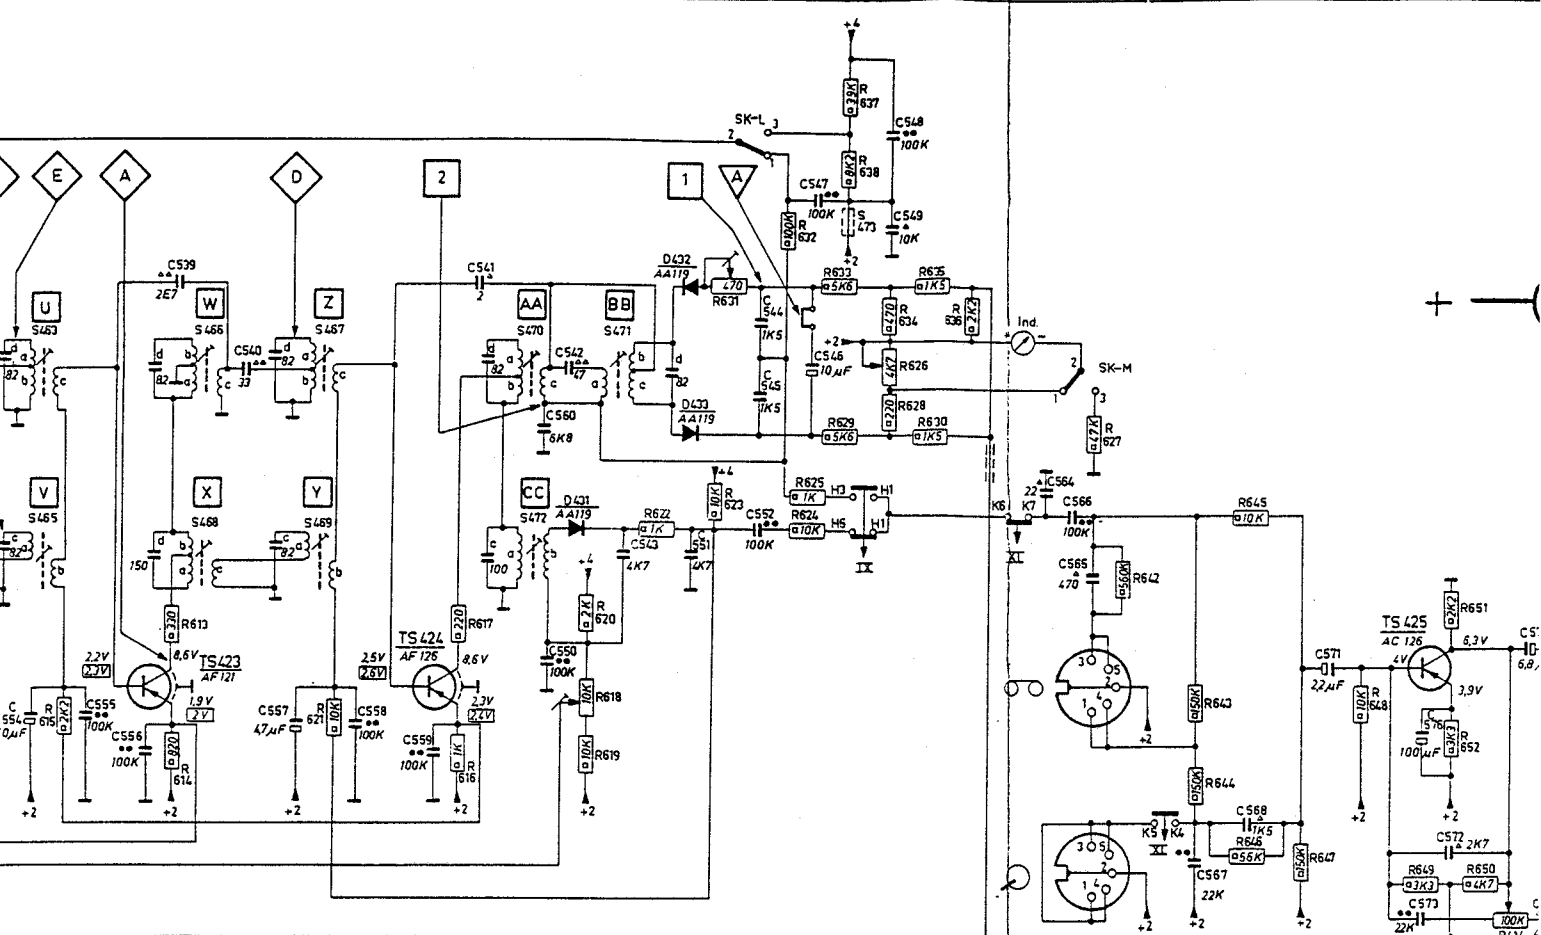


I : SW1-KG1-OC1-KW1-OC1
II : SW2-KG2-OC2-KW2-OC2
III : SW3-KG3-OC3-KW3-OC3
IV : SW4-KG4-OC4-KW4-OC4
V : MW-MG-PO-MW-OM
VI : LW-LG-GO-LW-OL
VII : FERROC.
VIII : Y
IX : FM-UKW
X : RADIO
XI : PU-TA





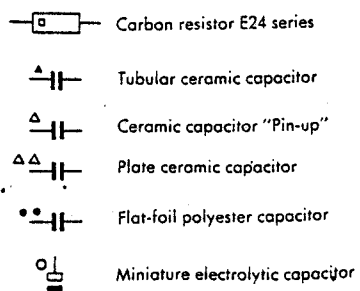

	APC
	AFR
SK-L	CAP
	AFR
	CAP
	Battery check
	Batterijcontrole
SK-M	Contrôle de la pile
	Batterietekontrolle
	Comprobación de la pila
	Dial illumination
	Schijalverlichting
SK-N	Eclairage du cadran
	Schalenbeuchtung
	Alumbrado del cuadrante
	Battery switch
	Batterijschakelaar
SK-P	Interrupteur de pile
	Batterieschakelaar
	Interruptor de pila
	Aerial switch
	Antenneschakelaar
SK-R	Commutateur d'antenne
	Antenneschakelaar
	Commutador de antena

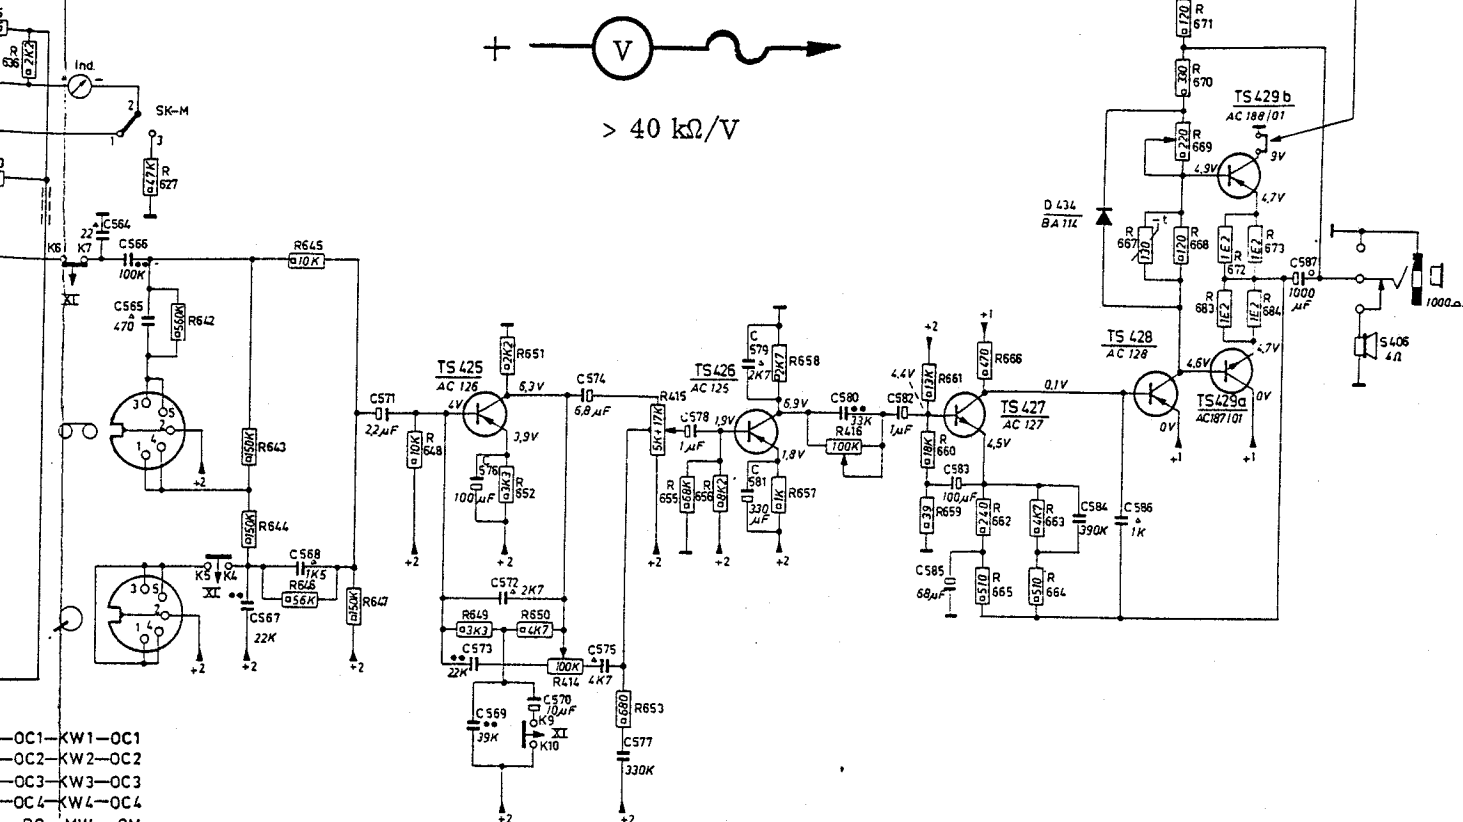* FORMED BY THE WIRING
WORDT GEVORMD DOOR DE
CONSTITUE PAR LE CABLAG
WIRD DURCH DIE VERDRAHT
ES FORMADA POR EL CABLE






—OC1—KW1—OC1
—OC2—KW2—OC2
—OC3—KW3—OC3
—OC4—KW4—OC4
—PO—MW—OM
—GO—LW—OL


[illegible]

	Carbon resistor E24 series	0.125 W	5%
	Tubular ceramic capacitor	500 V	
	Ceramic capacitor "Pin-up"	500 V	
	Plate ceramic capacitor		
	Flat-foil polyester capacitor		
	Miniature electrolytic capacitor		

566 567	584	585 588	570 571 579 572 580 577	578 575	DD, EE,	311	310	309	308	FF	S
590 591	586 593	587 583	589 585 573 581 592 576 582		336	337 339 340	331 323 325 335 331 334 330	326 328 329	321	327 324 322 332	C
643 644 679 677 667 664 666 664 642	665 663	662 660 649 661 660	651 659		348	350	349 345 347	348			R
678 669 671 675 670	668 647 683 645 684	658 680 666 648 652	672 673 657 656 653 655								R

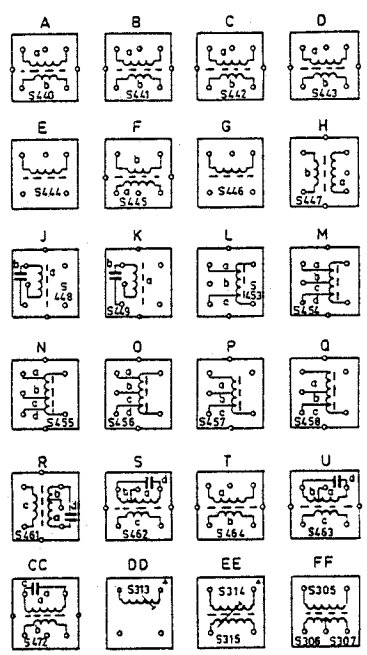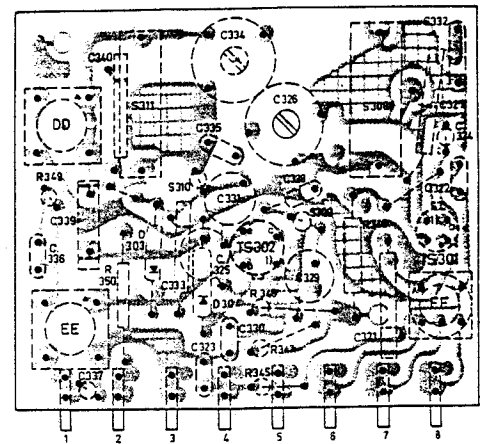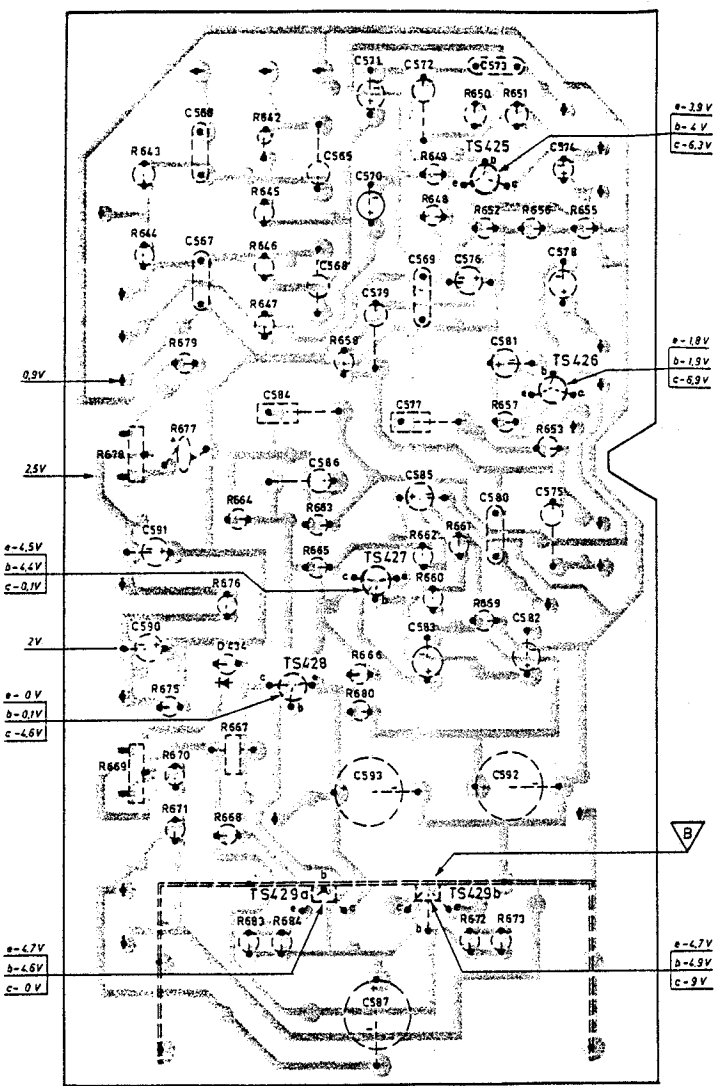


TRA 3430



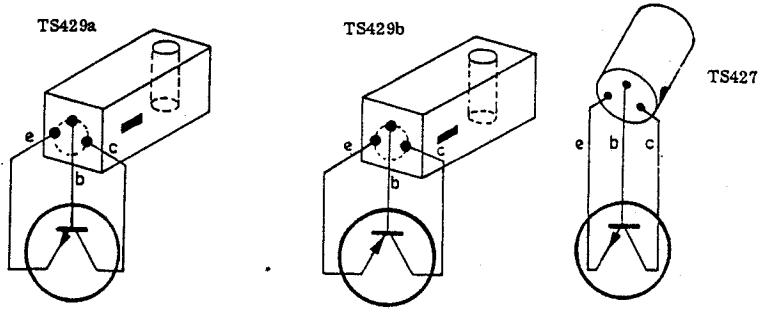


CS21892

	Push button	Signal	Apply to	Trimming point	Adjust	Indication
IF (AM)	MW + Ψ(SK-E+G)	① 470 kHz via 33 kpF		Minimum cap.		Max. output
					,	
					,	
					,	Min. output
RF (AM)	LW (SK-F)	157 kHz	②	A	, S404c/d	Max. output
	MW (SK-E)	550 kHz		A	, S404a/b	
	SW4 (SK-D)	1,66 MHz	③	A	,	
	SW3 (SK-C)	4,32 MHz		A	,	
	SW2 (SK-B)	8,06 MHz		A	,	
	SW1 + Ψ(SK-A+G)	16,1 MHz	④	A	,	
	SW1 + Ψ(SK-A+G)	26 MHz		B	C512,C484	
	SW2 (SK-B)	15 MHz	③	B	C516,C486	
	SW3 (SK-C)	7,83 MHz		B	C520,C489	
	SW4 (SK-D)	3,94 MHz		B	C524,C492	
	MW (SK-E)	1500 kHz	②	B	C528,C499	
	LW (SK-F)	393 kHz		B	C531,C501	
	LW + Ψ(SK-F+G)	157 kHz	④	Tune in		
	MW + Ψ(SK-E+G)	550 kHz				
	MW + Ψ(SK-E+G)	1500 kHz			C495	
	LW + Ψ(SK-F+G)	393 kHz			C498	
IF (FM)	FM+AFC(SK-H+L)	⑤ 10,7 MHz		C		⑥
					,	
					,	
		10,7 MHz	⑤		,	
			⑧		⑦	
		RF (FM)	FM+AFC(SK-H+L)		88 MHz	⑦
108 MHz	C334					
96 MHz	C326					



- ① Set the volume control to maximum. The signal applied should not be too strong in order to avoid overmodulation.
- ② Apply the signal via the coupling-coil of the ferroceptor.
- ③ Apply the signal via the coupling-coil of the frame aerial.
- ④ Apply the signal via the outside aerial
- ⑤ The signal applied is FM-modulated (50 Hz) with a sweep of 200 kHz. Open bridge . Connect an oscilloscope via 100 k Ω to Damp S470c by means of a 1500 Ω resistor.
- ⑥ Adjust for maximum height and symmetry of the band-pass curve.
- ⑦ Apply the signal to the FM outside aerial
- ⑧ Apply the signal as under ⑤. Close bridge . Connect the oscilloscope via 100 k Ω to . Remove the damping resistor from S470c.
- ⑨ Adjust for maximum linearity and symmetry of the S-curve.

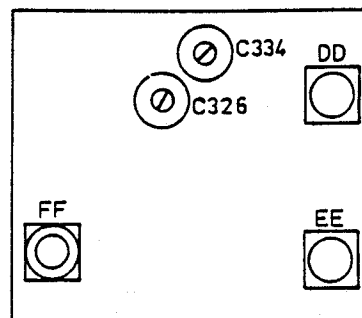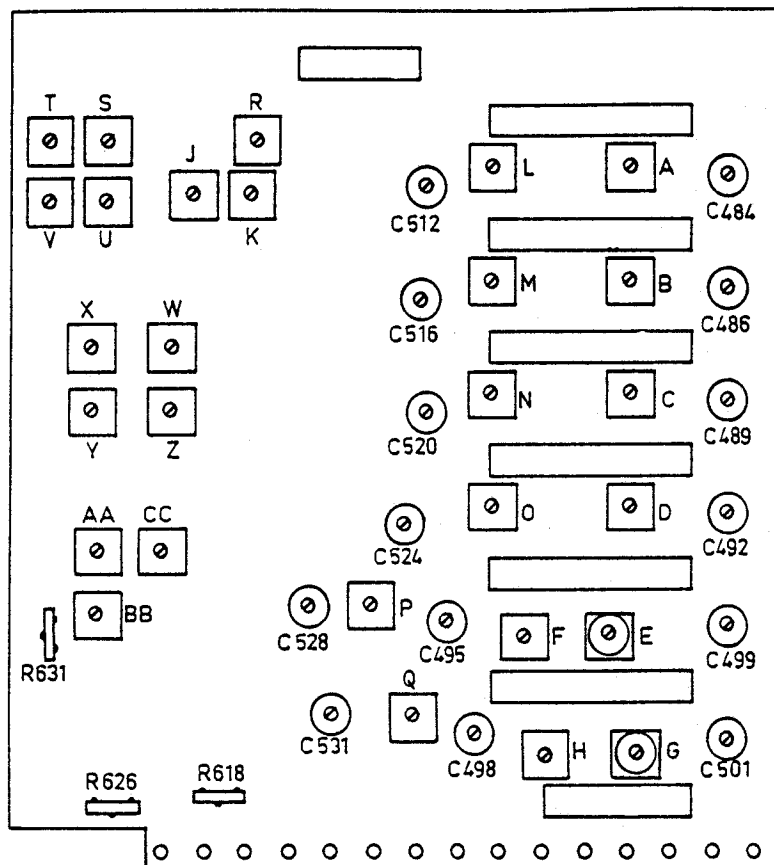

Adjustment of the AM rejection

Apply a frequency modulated (50 Hz) signal of 10,7 MHz with a 200 kHz sweep to the FM outside aerial. This signal should also be AM modulated with 1 kHz. Connect an oscilloscope to point [2] via 100 kΩ. Adjust for maximum AM rejection with R631, i.e. adjust the S-curve so that its linearity is maximum and passes through zero.

Adjustment of the quiescent current


Turn volume control R415 fully anti-clockwise. Open bridge ∇B and connect an mA-meter across this bridge. Now close bridge ∇B .

Checking the battery-voltage indication

Connect the set to a 4.5 V supply voltage. Depress SK-M. Then the pointer of the indicator (Ind.) should be at the transition of the grey and the black section.

Adjustment of the indicator.


Set the receiver to position MW, outside aerial by depressing SK-E and SK-G. Adjust the indicator (Ind.) to maximum deflection of the pointer by means of R626, without applying a signal. Set the receiver to position FM by depressing SK-H. (Consequently, SK-G is depressed also in this case). Now the indicator (Ind.) is to be adjusted for maximum deflection of the pointer with R618, without applying a signal.

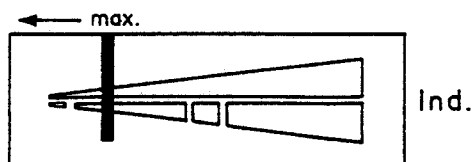



TRA 3485

Voltage adjustment C591, C590

Connect a voltmeter across C591. Adjust for a 1,6 V voltage across C591 with R678. The voltage across C590 should now be about 1.1 V.

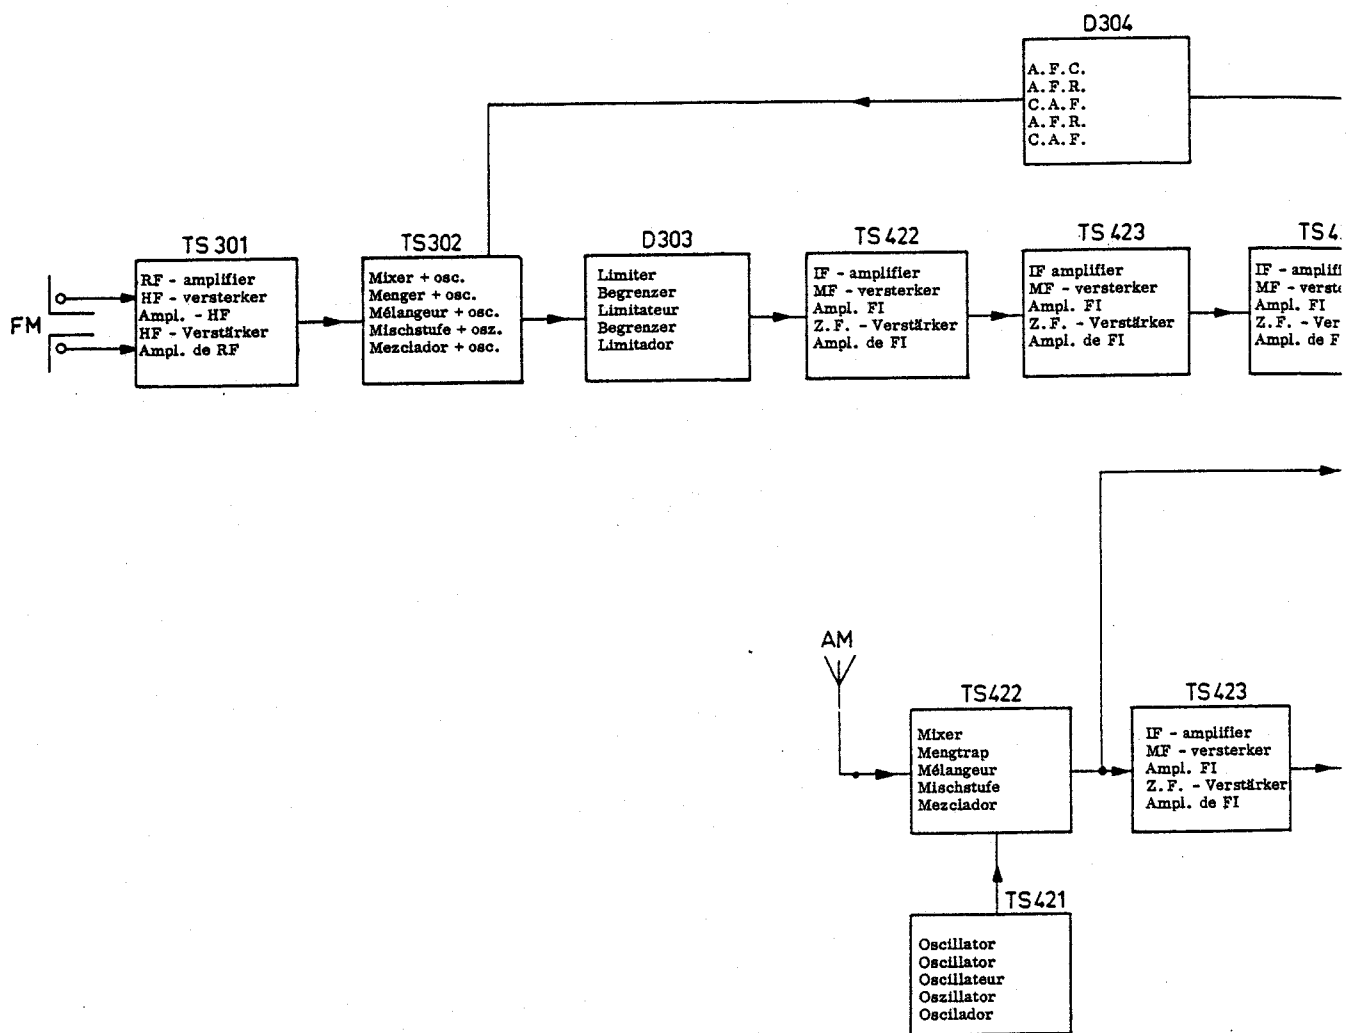

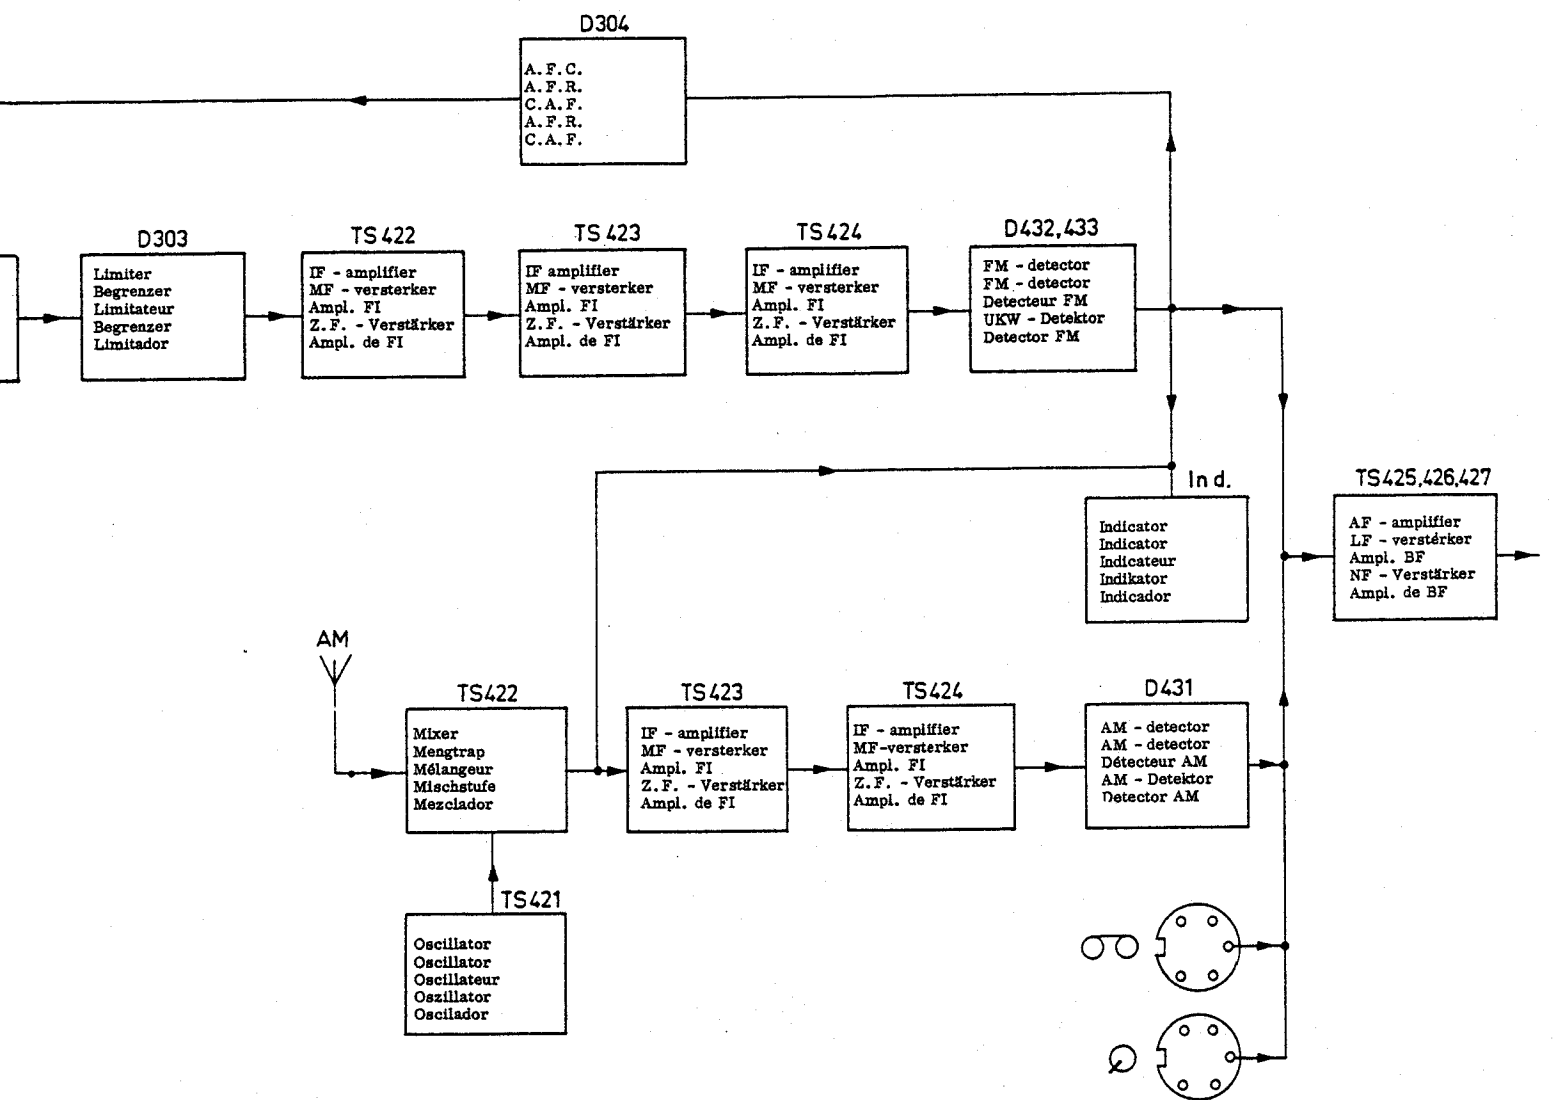

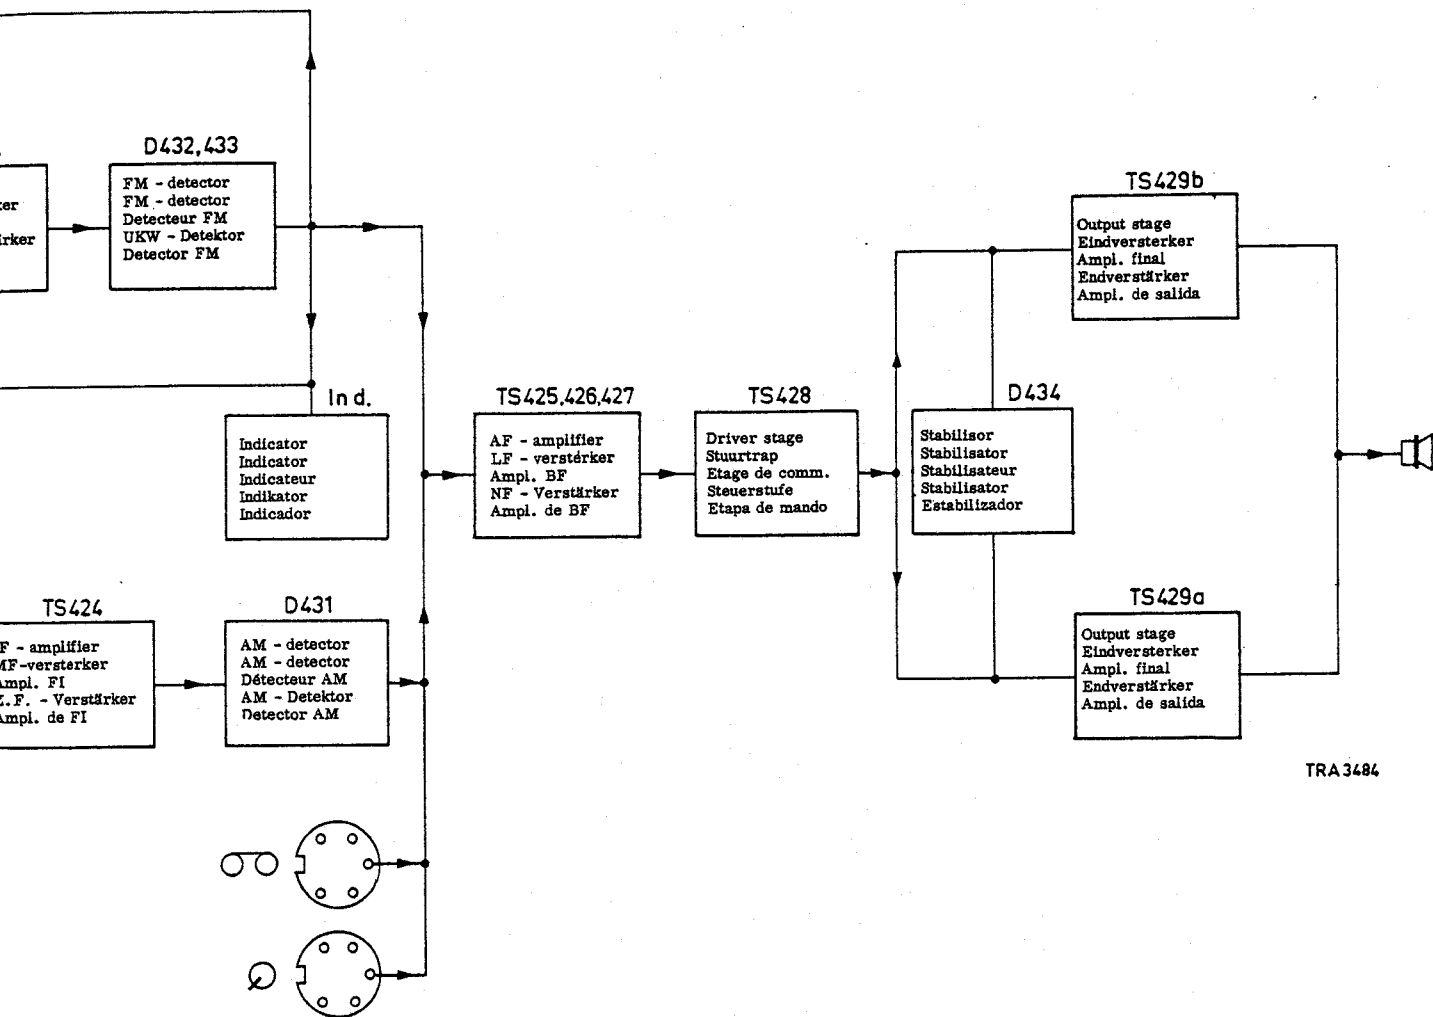

- S -

abcd

S404	4822 158 60075		Ferroceptor, MW/LW
S406	4822 240 20039		Loudspeaker
S440	4822 156 40092	39--	Aerial coil, SW1
S441	4822 156 40093	29--	Aerial coil, SW2
S442	4822 156 40094	40--	Aerial coil, SW3
S443	4822 156 40095	19--	Aerial coil, SW4
S444	4822 156 20197	89--	Aerial series coil, MW
S445	4822 156 40096	09--	Aerial coil, MW
S446	4822 156 20198	99--	Aerial series coil, LW
S447	4822 156 40097	98--	Aerial coil, LW
S448	4822 153 10102	001-	Rejection filter, AM
S449	4822 153 10081	24--	Absorption filter, AM
S453	4822 156 10146	69--	Oscillator coil, SW1
S454	4822 156 10147	59--	Oscillator coil, SW2
S455	4822 156 10148	101-	Oscillator coil, SW3
S456	4822 156 10149	201-	Oscillator coil, SW4
S457	4822 156 10151	301-	Oscillator coil, MW
S458	4822 156 10152	49--	Oscillator coil, LW
S459	4822 526 10024		Ferroxcube bead
S460	4822 157 50045		coil
S461	4822 153 50029	16--	IF coil, FM
S462	4822 153 50029	16--	IF coil, FM
S463	4822 153 50029	16--	IF coil, FM
S464	4822 156 40103	13--	IF coil, AM
S465	4822 153 10082	23--	IF coil, AM
S466	4822 153 50029	16--	IF coil, FM
S467	4822 153 50029	16--	IF coil, FM
S468	4822 153 10083	33--	IF coil, AM
S469	4822 153 10082	23--	IF coil, AM
S470	4822 153 50031	95--	Prim. detection coil, FM
S471	4822 153 50032	06--	Sec. detection coil, FM
S472	4822 153 10084	43--	Detection coil, AM
S473	4822 526 10024		Ferroxcube bead
S474	4822 526 10024		Ferroxcube bead

- C -

C410	4822 125 20021		Variable capacitor
C481	4822 121 50036	250 pF	1 %
C484	4822 125 50029	20 pF	trimmer
C485	4822 121 50072	1250 pF	
C486	4822 125 50029	20 pF	trimmer
C487	4822 121 50423	1270 pF	1 %
C489	4822 125 50029	20 pF	
C490	4822 121 50424	1000 pF	1 %
C492	4822 125 50026	10 pF	trimmer
C493	4822 121 50424	1000 pF	1 %
C494	4822 121 50039	270 pF	5 %
C495	4822 125 50029	20 pF	trimmer
C496	4822 121 50381	120 pF	5 %
C498	4822 125 50026	10 pF	trimmer
C499	4822 125 50026	10 pF	trimmer
C501	4822 125 50029	20 pF	trimmer
C506	4822 121 50432	1500 pF	2,5 %
C510	4822 121 50426	225 pF	1 %
C512	4822 125 50029	20 pF	trimmer
C513	4822 121 50039	270 pF	5 %
C514	4822 121 50037	260 pF	1 %
C516	4822 125 50026	10 pF	trimmer
C517	4822 121 50427	750 pF	5 %
C518	4822 121 50071	1125 pF	1 %
C520	4822 125 50029	20 pF	trimmer
C521	4822 121 50432	1500 pF	10 %

- C -

C522	4822 121 50111	731 pF	1 %
C524	4822 125 50026	10 pF	trimmer
C525	4822 121 50094	4700 pF	5 %
C526	4822 121 50429	642 pF	1 %
C528	4822 125 50029	20 pF	trimmer
C529	4822 121 50431	276 pF	1 %
C531	4822 125 50029	20 pF	trimmer
C538	4822 121 50088	3600 pF	2,5 %
C543	4822 121 50094	4700 pF	5 %
C544	4822 121 50432	1500 pF	10 %
C545	4822 121 50432	1500 pF	10 %
C546	4822 124 20355	10 μ F	25 V
C551	4822 121 50094	4700 pF	5 %
C554	4822 124 20355	10 μ F	25 V
C557	4822 124 20346	4,7 μ F	63 V
C560	4822 121 50096	6800 pF	5 %
C566	4822 124 20341	1 μ F	63 V
C570	4822 124 20353	10 μ F	63 V
C571	4822 124 20343	2,2 μ F	63 V
C574	4822 124 20351	6,8 μ F	40 V
C576	4822 124 20383	1000 μ F	10 V
C577	4822 121 40092	0,33 μ F	
C578	4822 124 20341	1 μ F	63 V
C581	4822 124 20401	330 μ F	4 V
C582	4822 124 20341	1 μ F	63 V
C583	4822 124 20383	100 μ F	10 V
C584	4822 121 40098	0,39 μ F	
C585	4822 124 20377	68 μ F	16 V
C590	4822 124 20377	68 μ F	16 V
C591	4822 124 20383	100 μ F	10 V

- R -


R413	4822 101 30053	1 k Ω	Potentiometer
R414	4822 101 30039	100 k Ω	Potentiometer
R416	4822 101 30074	5 k Ω +17 k Ω	Potentiometer
R601	4822 116 20003		VDR
R618	4822 100 10024	10 k Ω	Adj. potentiometer
R626	4822 100 10025	4700 Ω	Adj. potentiometer
R631	4822 100 10023	470 Ω	Adj. potentiometer
R667	4822 116 30016	130 Ω	NTC
R669	4822 100 10026	220 Ω	Adj. potentiometer
R672	4822 116 60004	1,2 Ω	0,125 W
R673	4822 116 60004	1,2 Ω	0,125 W
R677	4822 116 20094		VDR
R678	4822 100 10023	470 Ω	Adj. potentiometer
R683	4822 116 60004	1,2 Ω	0,125 W
R684	4822 116 60004	1,2 Ω	0,125 W

- TS -

TS301	4822 130 40385	
TS302	4822 130 40254	
TS421	4822 130 40254	
TS422	4822 130 40384	
TS423	4822 130 40385	
TS424	4822 130 40252	
TS425	4822 130 40236	
TS426	4822 130 40235	
TS427	4822 130 40096	
TS428	4822 130 40095	
TS429a	4822 130 40319	
TS429b		

- D -

D303	4822 130 40229	
D304	4822 130 30272	
D431	4822 130 40229	
D432	4822 130 30312	
D433		
D434	4822 130 30189	

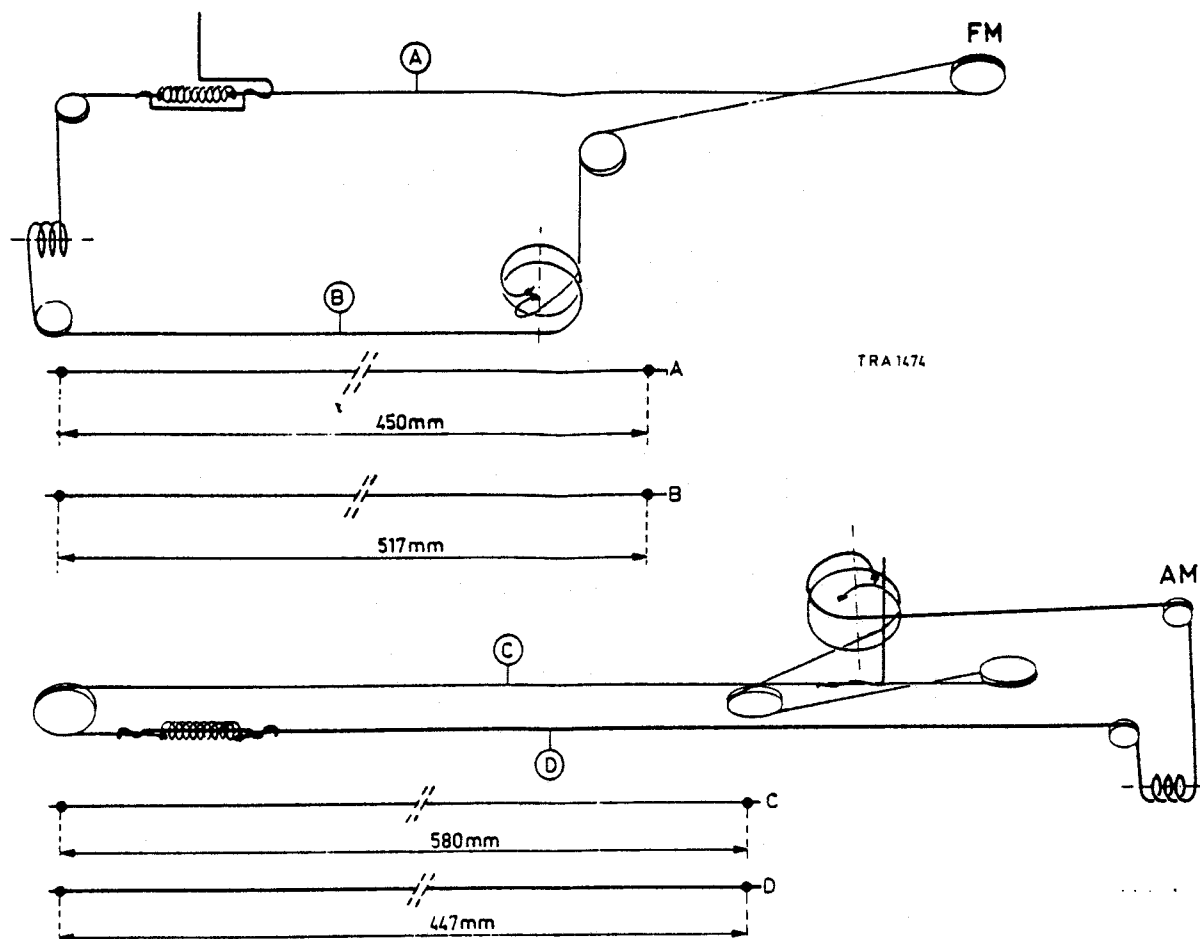

Cabinet

Ornamental front	4822 423 50075
Cover for scale	4822 423 50158
Side panel (right)	4822 423 20037
Side panel (left)	4822 423 20038
Bottom	4822 423 20036
Rear cover	4822 422 50016
Slide in rear cover for locking	4822 411 60053
Handle	4822 498 40267
Screw fixing handle	4822 502 10411
Philite disc fixing foot	4822 532 60033
Leg (metal)	4822 462 10023
Buffer for leg	4822 462 40062
Frame aerial	4822 303 40031
Hinge for cover and frame-aerial	4822 417 10041
Plate fixing hinge	4822 691 10027
Telescopic aerial	4822 303 30021
Screw fixing aerial	4822 502 10412
Scale assembly	4822 334 50071
Bracket fix. frame aerial	4822 404 10038

Chassis

Pulley (9,5 mm)	4822 528 80087
Pulley (17,5 mm)	4822 528 80086
Drum in driving	4822 528 40052
On-off indicator	4822 404 10029
Connection bracket for slide of SK-H	4822 404 10021
Connection bracket for slide of SK-G	4822 404 20024
Connection bracket for slide of SK-A ÷ F	4822 404 10025
Speed fix on slide of SK-A ÷ H	4822 492 60264
Drive cord	4822 321 30101
Connection strip with sockets	4822 267 20109
Scale-lamp holder	4822 255 10007

Battery holder

Assembly complete	4822 256 60022
Spiral spring-large	4822 492 50322
Spiral spring-small	4822 492 50375

Sockets

Aerial	4822 268 20002
PU + Recorder	4822 267 40039
Earphone	4822 420 40041
Nut fix. socket earphone	4822 505 10043
Car aerial	4822 267 30086
Ext. supply	4822 265 20051

Switch assemblies

Push button unit (SK-L, M, N)	4822 276 30062
Push button unit, wave ranges	4822 276 80014
SK-A (SW1)	4822 277 30099
SK-B (SW2)	4822 277 30101
SK-C-D (SW3-SW4)	4822 277 30102
SK-E (MW)	4822 277 30103
SK-F (LW)	4822 277 30104
SK-G (aerial)	4822 277 30105
SK-H (FM)	4822 277 30098
Slide of SK-A	4822 278 20107
Slide of SK-B	4822 278 20108
Slide of SK-C-D	4822 278 20109
Slide of SK-E	4822 278 20111
Slide of SK-F	4822 278 20112
Slide of SK-G	4822 278 20113
Slide of SK-H	4822 278 20071
Contact strip (SK-L, M, N)	4822 278 80069
Contact slide (SK-L)	4822 278 30029
Contact slide (SK-M, N)	4822 278 30006
Contact strip (SK-K, P)	4822 278 50029
Contact slide (SK-K, P)	4822 278 30018

Push-buttons

AFC-battery check - scale light	4822 410 20136
PU-off-wave ranges	4822 410 20297

Knobs

Tuning FM, AM	4822 413 50679
Volume-high-low-fine tuning	4822 413 30384
FM tuner	4822 210 30003
Tuning indicator	4822 347 10004
Lamp (LA-408)	4822 134 40005